


HONDA

Performance Curve

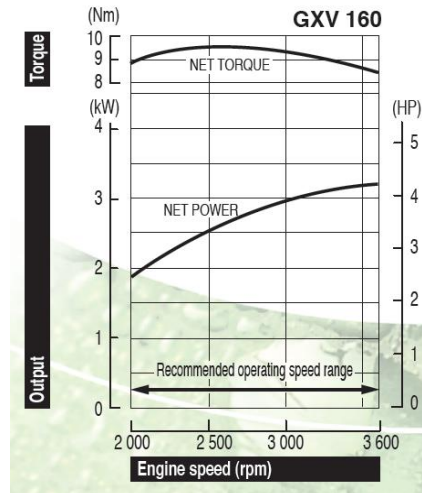

GXV160	
Type	Air-cooled 1 cylinder 4-stroke petrol engine (OHV), vertical shaft, cast iron sleeve
Bore and Stroke (mm)	68 x 45
Displacement (cm ³)	163
Compression ratio	8.0 : 1
Max. net torque (Nm / rpm)	9.6 / 2500
Net Power (kW / rpm)	3.2 / 3600
Continuous rated power (kW / rpm)	2.0 / 3600
Ignition system	Transistorised
Starting system	Recoil starter
Fuel tank capacity (L)	1.8
Fuel cons. at cont. rated power	1.1 L/hr - 3000 rpm
Engine oil capacity (L)	0.65
Dimension (L x W x H) (mm)	420 x 365 x 357
Dry weight (kg)	15.5

DISCLAIMER

Whilst Protech Industrial Equipment Ltd and its affiliates takes reasonable care to ensure the accuracy and completeness of any data or information provided by it on this web site, any person accessing this web site agrees that by so accessing this web site that Protech Industrial Equipment Ltd, its officers, employees and agents do not accept any liability of whatsoever nature for any direct, indirect, incidental or consequential loss or damage of any kind or nature, howsoever arising from the use of or reliance on any such data or information.